



ASFA L (9 mm) Hose Clamps in plastic bags

This new presentation was designed for shops with a self-service display area. The customers can see and touch the product before purchase. This format is ideal for customers who need only a small quantity of clamps. All bags are stamped with the Mikalor logo and are easily identifiable.


** The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.*

W1

Application Ø mm	Part nº	a +0,5 a -0,2	Maximum values		Units/bag	Quantity bags/ packing	Box Quantity (units)
			Torque (Nm)	Pressure(Bars)			
8-16	03008753B0	9	3,0	40	5	40	200
12-22	03008761B0	9	3,0	40	5	40	200
16-27	03008770B0	9	3,5	38	5	40	200
20-32	03008788B0	9	3,5	36	5	40	200
25-40	03008796B0	9	4,0	32	5	20	100
30-45	03008809B0	9	4,0	28	5	20	100
32-50	03008817B0	9	4,0	24	5	20	100
40-60	03008825B0	9	4,0	19	5	20	100
50-70	03008833B0	9	4,0	17	5	20	100

** It is recommended to apply 75% of the maximum values contained in the table.*

TECHNICAL INFORMATION	
MATERIAL	BAND AND HOUSING: GALVANIZED STEEL (EN 10292) SCREW: STEEL Qst 36-3 (DIN 1.0213)
FINISH	BAND AND HOUSING: GALVANIZED STEEL SCREW: GREY-WHITE Cr3 ZINC-PLATED
CORROSION RESISTANCE	144 HOURS SALT SPRAY (ASTM B-117)
MAXIMUM TIGHTENING SPEED (RPM)	540 ±5

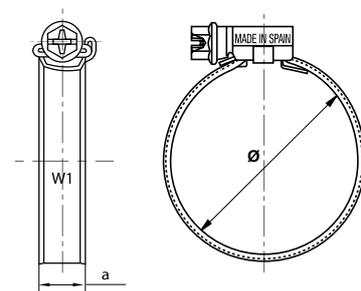



SUPRA Hose Clamps in plastic bags


This new presentation was designed for shops with a self-service display area. The customers can see and touch the product before purchase. This format is ideal for customers who need only a small quantity of clamps. All bags are stamped with the Mikalor logo and are easily identifiable.

** The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.*

W2

Application Ø mm	Part n°	a	Maximum values		Units/bag	Quantity bags/ packing	Box Quantity (units)
			Torque (Nm)	Pressure (Bars)			
19-21	03019020B0	18	10	40	2	25	50
23-25	03019047B0	18	10	40	2	25	50
25-27	03019055B0	18	10	40	2	25	50
29-31	03019071B0	20	12	35	2	25	50
31-34	03019080B0	20	12	35	2	25	50
37-40	03019100B0	20	12	35	2	25	50
40-43	03019119B0	20	12	35	2	25	50
43-47	03019127B0	20	12	35	2	25	50
47-51	03019135B0	20	16	30	2	25	50
51-55	03019143B0	20	16	30	2	25	50
55-59	03019151B0	20	16	30	2	25	50
59-63	03019160B0	20	16	30	2	25	50
63-68	03019178B0	20	16	30	2	25	50
68-73	03019186B0	25	30	20	2	25	50

** It is recommended to apply 75% of the maximum values contained in the table.*

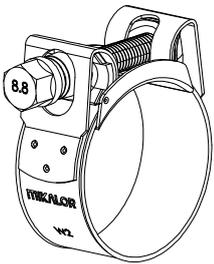TECHNICAL INFORMATION	
	MATERIAL BAND AND BRIDGE: STAINLESS STEEL X6CR17 AISI-430 SCREW: STEEL Øst 34-3 (DIN 1.0213) 8.8 grade steel
	FINISH STAINLESS STEEL
	CORROSION RESISTANCE 72 HOURS SALT SPRAY (ASTM B-117)
	MAXIMUM TIGHTENING SPEED (RPM) 540 ±5

