




## “Normal” Mini Clip Blister Pack


The Mikalor “Normal” Mini Clip is also available in a sealed plastic blister pack which guarantees that the product is both well-presented and protected. This packing option is ideal for sales points as it allows for self-service, meaning that the customer can avoid unnecessary waits.

*\* The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.*

“Normal” Miniclip							
Part n°	Article	Application Ø	Width	Maximum values		Units/Blister	Blister/Packing
				Torque (Nm)	Pressure (Bars)		
B301056-0	“Normal” Miniclip 12-13	12-13	10	1	12,5	6	20
B301058-7	“Normal” Miniclip 14-15	14-15	10	1	12	6	20
B301059-5	“Normal” Miniclip 15-17	15-17	10	1	12	6	20
B301060-8	“Normal” Miniclip 16-18	16-18	10	1	11	6	20
B301063-2	“Normal” Miniclip 20-22	20-22	10	1	10	6	20

*\* It is recommended to apply 75% of the maximum values contained in the table.*

	TECHNICAL INFORMATION	
	<b>MATERIAL</b>	BAND: STEEL ST3 K32 (EN10215) SCREW: STEEL GRADE 6 NUT: STEEL GRADE 6
	<b>FINISH</b>	GREY-WHITE CR3 ZINC-PLATED
	<b>CORROSION RESISTANCE</b>	72 HOURS SALT SPRAY (ASTM B-117)

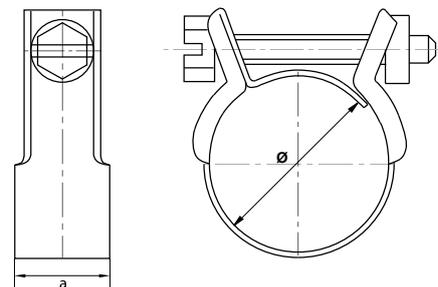



## ASFA L (9 mm) Blister Pack

The ASFA L hose clamp is also available in a sealed plastic blister pack which guarantees that the product is both well-presented and protected. Two material qualities are available in blister packs, galvanized Steel (W1) and AISI 316 stainless steel. The packs contain 2, 4 and 6 units depending on the dimension of the clamps. This packing option is ideal for sales points as it allows for self-service and also incorporates full product information meaning that the customer can avoid unnecessary waits.

*\* The maximum application pressure can vary depending on the type of hose used and the geometry of the coupling.*

ASFA W1							
Part nº	Article	Application Ø	Width	Maximum values		Units/Blister	Blister/Packing
				Torque (Nm)	Pressure (Bars)		
B300875-3	ASFA-L W1 8-16	8-16	9	3,0	40	6	20
B300876-1	ASFA-L W1 12-22	12-22	9	3,0	40	6	20
B300877-0	ASFA-L W1 16-27	16-27	9	3,5	38	4	20
B300878-8	ASFA-L W1 20-32	20-32	9	3,5	36	4	20
B300879-6	ASFA-L W1 25-40	25-40	9	4,0	32	2	20
B300880-9	ASFA-L W1 30-45	30-45	9	4,0	28	2	20
B300881-7	ASFA-L W1 32-50	32-50	9	4,0	24	2	20
B300882-5	ASFA-L W1 40-60	40-60	9	4,0	19	2	20

ASFA W5							
Part nº	Article	Application Ø	Width	Maximum values		Units/Blister	Blister/Packing
				Torque (Nm)	Pressure (Bars)		
B301575-9	ASFA-L W5 8-16	8-16	9	3,0	40	6	20
B301576-7	ASFA-L W5 12-22	12-22	9	3,0	40	6	20
B301577-5	ASFA-L W5 16-27	16-27	9	3,5	38	4	20
B301578-3	ASFA-L W5 20-32	20-32	9	3,5	36	4	20
B301580-4	ASFA-L W5 25-40	25-40	9	4,0	32	2	20
B301581-2	ASFA-L W5 30-45	30-45	9	4,0	28	2	20
B301582-0	ASFA-L W5 32-50	32-50	9	4,0	24	2	20
B301583-9	ASFA-L W5 40-60	40-60	9	4,0	19	2	20

*\* It is recommended to apply 75% of the maximum values contained in the table.*

TECHNICAL INFORMATION	
<b>MATERIAL</b>	BAND AND HOUSING: GALVANIZED STEEL (EN 10292) SCREW: STEEL Øst 36-3 (DIN 1.0213)
<b>FINISH</b>	W1: GALVANIZED STEEL W5: STAINLESS STEEL AISI 316
<b>CORROSION RESISTANCE</b>	W1: 144 HOURS SALT SPRAY W5: 1000 HOURS SALT SPRAY (ASTM B-117)
<b>MAXIMUM TIGHTENING SPEED (RPM)</b>	540 ±5

